


UT650/850/1050E-FR

UT Series

Fire-Resistant UPS with The Most Durable Capability For Protection

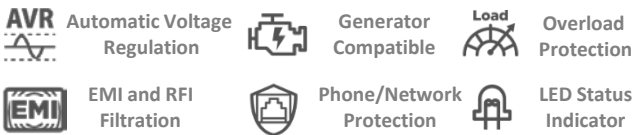

Featuring the best-in-class fireproof plastic housing, the UT series UPS provides an outstanding fire-resistance capability to minimize the possible damages of valuable assets in case of any fire incident. With CyberPower's innovative Battery Management Technology, it significantly increases the battery efficiency and therefore a longer battery life. The configurable alarm allows users to switch ON/OFF the audible alarm when UPS is on battery mode to avoid any disturbance. Its generator compatibility provides an extensive application scenario during power outage. With the built-in Automatic Voltage Regulation (AVR) stabilizing the AC signal and maintaining a safe voltage, it allows the UPS to maintain safe power levels through Boost and Buck function for the connected equipment without resorting to battery power.

APPLICATIONS





- Home and Home Office
- Small Office

SERIES FEATURES

- Automatic Voltage Regulation (AVR)
- Generator Compatible
- Simulated Sine Wave Output
- Overload Protection
- LED Status Indicator
- Fire-Resistance Capability
- Configurable Alarm
- Battery Management Technology
- Compact Size

UT650/850E-FR

UT1050E-FR



FRONT

BACK

FRONT

BACK



Automatic Voltage Regulation

Automatic Voltage Regulation provides clean, consistent AC power by automatically regulating low voltages and over voltages, within defined tolerances, when incoming utility power has minor fluctuations.



Fire-Resistance Capability

CyberPower adopts the best-in-class fireproof plastics in the industry, and the outstanding fire resistant capability minimizes the possible damage of your valuable assets in case of any fire incident.



TECHNICAL SPECIFICATIONS

Model Name	UT650E-FR	UT850E-FR	UT1050E-FR
General			
UPS Topology	Line-interactive	Line-interactive	Line-interactive
Energy Saving	-	-	-
Input			
Voltage	230Vac \pm 10%	230Vac \pm 10%	230Vac \pm 10%
Input Voltage Range	165 - 290Vac	165 - 290Vac	165 - 290Vac
Input Frequency Range	50/60Hz \pm 5 (Auto-sensing)	50/60Hz \pm 5 (Auto-sensing)	50/60Hz \pm 5 (Auto-sensing)
Rated Input Current	2.95A	3.86A	4.77A
Plug Type	Schuko	Schuko	Schuko
Output			
VA	650	850	1050
Watt.	360	425	630
On Battery Waveform	Simulated Sine Wave	Simulated Sine Wave	Simulated Sine Wave
On Battery Voltage	230Vac \pm 10%	230Vac \pm 10%	230Vac \pm 10%
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck	Single Boost, Single Buck	Single Boost, Single Buck
On Battery Frequency	50/60Hz \pm 1%	50/60Hz \pm 1%	50/60Hz \pm 1%
Outlets - Total	2	2	3
Outlet Type	FR x 2	FR x 2	FR x 3
Outlets - Battery & Surge Protected	-	-	-
Outlets - Surge-only Protected	-	-	-
Outlets - Battery Backup	2	2	3
Typical Transfer Time	4ms	4ms	4ms
Battery			
Runtime at 60W (min)	28	30	65
Runtime at 90W (min)	16	20	43
Battery Type	Sealed Lead-acid	Sealed Lead-acid	Sealed Lead-acid
Battery Quantity	1	1	2
User Replaceable	-	-	-
Typical Recharge Time	8 Hours	8 Hours	8 Hours
Replacement Battery Pack	RBPO118	RBPO062	RBP0119
Replacement Battery Pack Quantity	1	1	2
Surge Protection & Filtering			
Surge Suppression (Joules)	-	-	-
Phone / Network Protection RJ11/RJ45	1-in, 1-out	1-in, 1-out	1-in, 1-out
Management & Communications			
LCD Control Panel	-	-	-
HID Compliant USB Port	-	-	-
Serial Port	-	-	-
LED Indicators	Power On, Line Mode, Battery Mode, Low Battery		
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault		
Software	-	-	-
Physical			
Form Factor	Tower	Tower	Tower
Physical - UPS Module			
Dimensions (WxHxD) (mm.)	84 x 159 x 252	84 x 159 x 252	100 x 189 x 325
Weight (kg.)	3.8	4.2	6.9
Environmental			
Operating Temperature	32 °F to 104 °F / 0 °C to 40 °C	32 °F to 104 °F / 0 °C to 40 °C	32 °F to 104 °F / 0 °C to 40 °C
Operating Humidity	0% - 90% Non-condensing	0% - 90% Non-condensing	0% - 90% Non-condensing
Operating Elevation	0-10,000 feet (0-3,000 meters)	0-10,000 feet (0-3,000 meters)	0-10,000 feet (0-3,000 meters)
Storage Temperature	- 4 °F to 122 °F / -20 °C to 50 °C	- 4 °F to 122 °F / -20 °C to 50 °C	- 4 °F to 122 °F / -20 °C to 50 °C
Storage Relative Humidity	0% - 90% Non-condensing	0% - 90% Non-condensing	0% - 90% Non-condensing
Online Thermal Dissipation	40 BTU/hr	40 BTU/hr	45 BTU/hr

*All specifications are subject to change without notice. ©2016 CyberPower Systems. All Trademarks are the property of their owners.

